


PVC
5 5/8"

SINGLE

HUNG +

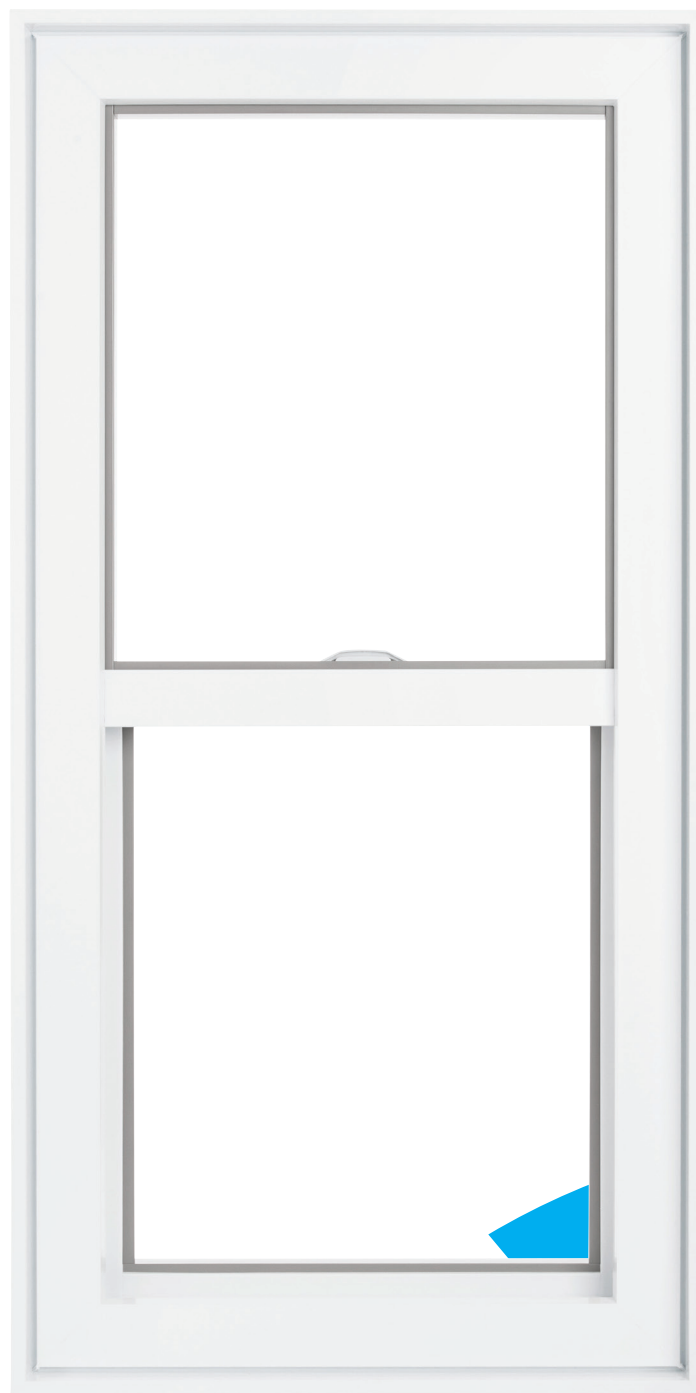

Portes et Fenêtres
Manufacturier

PVC 5 5/8"

SINGLE HUNG +

CHARACTERISTICS

1. Multi-chamber welded PVC frame for better insulation.
2. Strong PVC welded sash.
3. 5 5/8" frame positioning the glass in the warmer part of the wall.
4. Virgin PVC extruded profiles provide a glossy finish and facilitate cleaning.
5. Integrated handle on the sash.
6. Sash can be tilted to facilitate cleaning.
7. Matches other products from SONIPLASTICS and DECKO DOORS.

OPTIONS

- A. Double or triple glass.
- B. Multitude of interior or exterior mouldings.

PERFORMANCES

Primary designator: Class R - PG55 - 1000 x 1600 mm (39 x 63 in) - Type H

Positive design pressure (DP):	4080 Pa (85.21 psf)
Negative design pressure (DP):	-4080 Pa (-85.21 psf)
Water penetration resistance test pressure:	400 Pa (8.35 psf)
Canadian air infiltration / exfiltration level:	A3

Primary designator: Class R - PG70 - 1000 x 1600 mm (39 x 63 in) - Type H

Positive design pressure (DP):	3360 Pa (70.18 psf)
Negative design pressure (DP):	-3360 Pa (-70.18 psf)
Water penetration resistance test pressure:	580 Pa (12.11 psf)
Canadian air infiltration / exfiltration level:	A3

Results obtained according to standards:

AAMA/WDMA/CSA 101/I.S.2/A440-11 (NAFS 2011), CSA A440S1-09 & CSA A440S1-17
AAMA/WDMA/CSA 101/I.S.2/A440-17 (NAFS 2017), CSA A440S1-19



Portes et Fenêtres
Manufacturier